

RETRACTA-BELT – Plus

Retracta-belt *Plus* is our premium retractable belt queue management system. With a choice of high quality polished 304 grade stainless steel finish, or powder coat over stainless steel. With our unique rubber moulded base with stainless steel skirt to match – this barrier would look at home in the most prestigious environments.

Receiver posts (with no cassette assembly and/or belt) are available. Retracta-belt *Plus* has built-in 4-way connectivity and is compatible with other retractable barrier systems. It is manufactured with a serviceable head with replacement parts readily available.

With a height of 950mm to top of belt, the post is 63mm diameter while the freestanding base is 380mm in diameter. Available with 9 belt colour options, the Retracta-belt *Plus* is flat packed. Weight of freestanding post and base 10.5kg. Extension 0-2.4 metres.

Buyers considering this product should also look at the Econo-belt. See section 7.1 for more information.

PART No.	DESCRIPTION
RP	Retracta-belt plus stainless steel
RP-POST	Retracta-belt plus stainless steel receiver post
RPP	Retracta-belt plus powder coated
RPP-POST	Retracta-belt plus powder coated receiver post
RSH	Retracta-belt sign holder


Value Features:

- » 2.4 metre belt extension.
- » Durable 304 Grade Stainless steel, 1.6mm thick.
- » Choice of polished stainless steel or powder coat finish over stainless steel.
- » Moulded rubber base, is easy on floors and furniture.
- » Serviceable head with replacement parts readily available.
- » Built-in 4-way connectivity.
- » Compatible with other retractable barrier systems.
- » Locking belt ends.
- » Tension adjustable.
- » Built in sign frame adaptor.
- » Available with 9 belt options.

Specifications:

Material:	304 grade stainless steel post. Moulded rubber base with stainless steel skirt to match post.
Height:	950mm to top of belt.
Diameter:	Post 63mm x 1.6mm thick. RP 380mm at base.
Weight:	RP 10.5kgs post and base.
Extension:	0-2.4 metres.
Delivery:	Flat packed.
Belts:	Standard colours and options. Refer to Section 7.5.

**PREMIUM
304 GRADE
STAINLESS
STEEL 1.6MM
THICK**

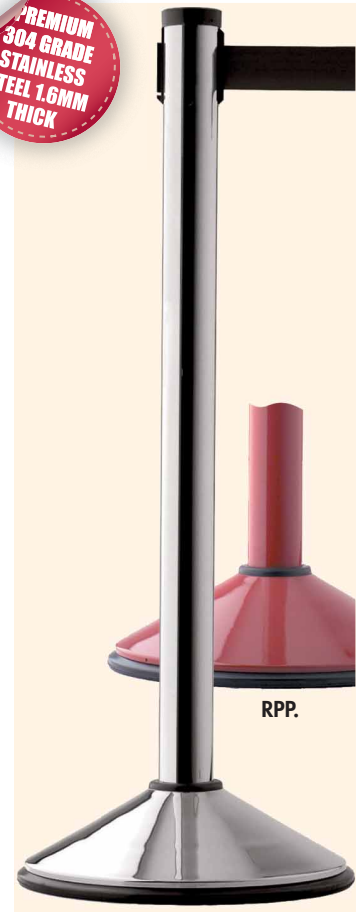

RP.

SECTION 7.3.2

RETRACTA-BELT – CD

The Retracta-belt CD has all the same quality and features as the standard 'Plus' model above with one major difference. Where the 'Plus' model is a free standing unit with an eight kilo base, the CD is a plug and socket design.

Simply plug the post into the stainless steel socket embedded into the floor. No more bulky bases causing trips and becoming scratched and dented, the CD is only 63mm in diameter at the floor.

The CD requires no tools to install or remove from the socket and the unique design, while being simple to install is also tamper resistant once in place.

Other benefits include the ability to rotate through 360° for belt alignment, reduced storage area and ease of transport (the CD-cart allows 1 person to move up to 50 units at one time).

PART No.	DESCRIPTION
RCD	Retracta-belt CD stainless steel
RCD-POST	Retracta-belt CD stainless steel receiver post
RCDP	Retracta-belt CD stainless steel powder coated
RCDP-POST	Retracta-belt CD stainless steel powder coated receiver post
RCDP-S	Retracta-belt CD stainless steel in-ground socket
RCD-C	Retracta-belt CD storage cart (holds 50 posts)
RSH	Retracta-belt sign holder

Value Features:


- » 2.4 metre belt extension.
- » Premium 304 grade stainless steel.
- » No more scratched and dented bases.
- » Reduced tripping and traffic hazard.
- » Unique post and socket design is tamper resistant.
- » No tools required to remove or replace posts.
- » No bases means storage and handling is much easier.
- » Total weight is less than 3kgs.
- » All other standard Retracta-belt Plus features.
- » Capped floor sockets in 304 stainless steel.



Specifications:

Material:	304 grade stainless steel post and in-ground socket.
Height:	950mm to top of belt.
Diameter:	Post 63mm x 1.6mm thick. In-ground socket 50mm dia.
Weight:	Post 3kgs. Socket 0.5kgs.
Extension:	0-2.4 metres.
Delivery:	Individual carton.
Belts:	Standard colours and options. Refer to Section 7.5.

**PREMIUM
304 GRADE
STAINLESS
STEEL 1.6MM
THICK**

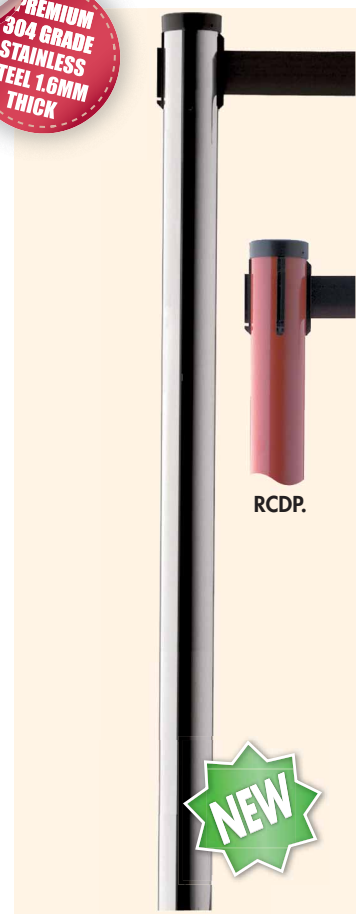

RCD.

NEW